

03-17-00

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P00,0458

First Named Inventor or Application Identifier

Harald Berger et al,

Express Mail Label No: # EL497037903US

03/16/00
09/527140
U.S. PTO

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Specification [Total Pages 21]
2. ☒ Drawing(s) (35USC 113) [Total Pages 5]
3. ☒ Declaration and Power of Attorney [Total Pages 2]
 - a. ☐ Newly executed declaration (Original copy)
 - b. ☐ Copy from prior application (37CFR 1.63(d))
(for continuation/divisional with Box 14 completed)
 - i. ☐ **[Note Box 4 Below]**
DELETION OF INVENTOR(S)
Signed statement attached deleting
Inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
4. ☐ Incorporation By Reference (usable if Box 3b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 3b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

5. ☐ Assignment Papers (cover sheet & documentation)
6. ☒ Letter under 37 CFR 1.41(c).
7. ☐ English Translation Document (if applicable)
8. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
9. ☐ Preliminary Amendment
10. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
11. ☐ Small Entity Statement filed in prior application, Status still proper and desired
12. ☐ Certified Copy of Priority Document(s) German Application No. 199 11 713.6 filed March 16, 1999
13. ☐ Other:

14. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) ☐ of prior application No: /

CLAIMS AS FILED

| (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) BASIC FEE \$690.00 |
|--|---------------------|------------------------|------------------------|------------------------------|
| TOTAL CLAIMS 20 | 9 | | | |
| INDEPENDENT CLAIMS 3 | 2 | | | |
| ANY MULTIPLE DEPENDENT CLAIMS? (YES (X) NO) | | | | |
| | | | TOTAL FILING FEE -> | \$690.00 |

☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with this application, or credit any overpayment to ACCOUNT NO. 08-2290. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$ 690.00 to cover the filing fee is enclosed.

15. CORRESPONDENCE ADDRESS

HILL & SIMPSON
A Professional Corporation
233 South Wacker Drive - 85th Floor Sears Tower
Chicago, Illinois 60606
Telephone (312) 876-0200 - Fax (312) 876-0898

SIGNATURE:
491/1261:1190
U-11

David R. Metzger

DATE: March 16, 2000

HILL & SIMPSON
A PROFESSIONAL CORPORATION
ATTORNEYS AND COUNSELORS AT LAW
CHICAGO, ILLINOIS 60606-6592

JOHN D. SIMPSON*
JAMES A. MOEHLING
DENNIS A. GROSS
ROBERT M. BARRETT
STEVEN H. NOLL
KEVIN W. GUYNN
SCOTT W. PETERSEN
ROBERT M. WARD
BRETT A. VALIQUET
GEORGE C. SUMMERFIELD**
LEWIS T. STEADMAN, JR
EDWARD A. LEHMAN
DAVID R. METZGER
TODD S. PARKHURST
JOHN R. NYWEIDE
JAMES D. HOBART
MELVIN A. ROBINSON
C. GRANT MCCORKHILL
JOSEPH P. REAGEN
MICHAEL R. HULL
MICHAEL S. LEONARD
WILLIAM E. VAUGHAN

PATRICIA A. KANE
BRYAN J. LEMPIA
PATRICK B. LAW***
THOMAS C. BASSO
MARK BERGNER
LISA A. CARROLL

LEWIS T. STEADMAN
JAMES VAN SANTEN
MARVIN MOODY
J. ARTHUR GROSS
OF COUNSEL

DOLORES K. HANNA
SPECIAL TRADEMARK COUNSEL

CHRISTOPHER P. RAUCH
REG. PAT. AGENT

**MICHIGAN BAR ONLY
***D.C. AND MISSOURI BARS

CHICAGO OFFICE
85TH FLOOR SEARS TOWER
CHICAGO, ILLINOIS 60606
TELEPHONE (312) 876-0200
FACSIMILE (312) 876-0898
E-MAIL: counsel@hillfirm.com

WASHINGTON OFFICE
SUITE 1004-BLDG. I
2001 JEFFERSON DAVIS HIGHWAY
CRYSTAL CITY
ARLINGTON, VIRGINIA 22202
TELEPHONE (703) 415-1515

*MUNICH OFFICE
FRANZ-JOSEPH STRASSE 38
D-80801 MUNICH, GERMANY
49-89-3840720

March 15, 2000

Hon. Assistant Commissioner for Patents
Washington D.C. 20231


Re: Proposed Patent Application for HARALD BERGER, MARKUS JABS,
and GERHARD SCHARFEN entitled "SWITCHING DEVICE AND
METHOD FOR PARALLEL CONNECTION OF SUBSCRIBER TERMINAL
DEVICES", Attorney Docket No. P00,0458

SIR:

Under the provisions of 37 CFR § 1.41 (c), I am filing the attached application with 9 claims, 5 sheets of informal drawings and filing fee on behalf of HARALD BERGER, MARKUS JABS and GERHARD SCHARFEN and request that the application papers be assigned a serial number and filing date.

I request that the application be assigned a Serial No. and Filing Date pursuant to the provisions of 37 C.F.R. § 1.53(b) and 37 C.F.R. § 1.53(f).

Respectfully submitted,



John D. Simpson (Reg. No. 19,842)
Attorney for Applicant

003600-047-0000

SPECIFICATION

TITLE

SWITCHING DEVICE AND METHOD FOR PARALLEL CONNECTION OF SUBSCRIBER TERMINAL DEVICES

BACKGROUND OF THE INVENTION

The present invention is directed to a switching device for parallel connection of subscriber terminal devices and to a pertaining method and is particularly directed to a private branch exchange and a pertaining method for parallel connection of subscriber terminal devices.

With the spread of, in particular, cordless subscriber terminal devices such as, for example, DECT telephones, users increasingly have the desire for a parallel connection of these cordless subscriber terminal devices with already existing, wire-bound subscriber terminal devices.

For realizing such an expanded function, for example, a rerouting can be activated at the wire-bound subscriber terminal device, as a result whereof all incoming calls are then only signaled at the cordless subscriber terminal device. In this way, the user can be reached via the cordless subscriber terminal device, whereby rerouting can also be undertaken to other, external subscriber terminal devices. What is disadvantageous about this traditional solution, however, is the relatively complicated procedure for activating or deactivating the call redirection in the wire-bound subscriber terminal device. Further, an incoming call is only signaled at the cordless subscriber terminal device and is no longer signaled at the wire-bound subscriber terminal device.

In some traditional switching devices, further, there is the possibility of connecting subscriber terminal devices connected thereto in parallel in terms of switching technology via what is referred to as a "team solution" or a "hunt group". In this case, incoming calls are simultaneously signaled at all subscriber

terminal devices connected in parallel. A complicated activation/deactivation of the above-described call redirection is eliminated in this solution since the calls are automatically signaled at all subscriber terminal devices connected in parallel. What is disadvantageous about this traditional solution, however, is that the respective subscriber terminal devices - dependent on the specific, technical realization - occupy the same or different lines given an outgoing call and, accordingly, are also differently signaled or indicated with the same or different telephone numbers toward the outside.

SUMMARY OF THE INVENTION

The present invention is based on the object of providing a switching device and a method pertaining thereto for parallel connection of subscriber terminal devices that enables enhanced user comfort.

This object is inventively achieved in accordance with the present invention in a switching device for parallel connection of a number of subscriber terminal devices, said switching device comprising: an insert unit for providing a number of subscriber interfaces each to one of said subscriber terminal devices; and a control unit. The control unit has: a central control unit for controlling central switching events in said switching device; and a peripheral control unit for controlling linking of said number of subscriber interfaces to said subscriber terminal devices. The peripheral control unit has: an interface driver for controlling at least two of said subscriber interfaces, said interface driver having: a principal subscriber control for controlling a principal subscriber terminal device; at least one subsidiary subscriber control for controlling at least one subsidiary subscriber terminal device; a central driver control for central controlling of administration events in said interface driver; a first connection device for physically connecting said principal subscriber control and said at least one subsidiary subscriber control; and a second connection device for

logically connecting said principal subscriber control to said at least one subsidiary subscriber control.

This object is also inventively achieved in accordance with the present invention in a method for connecting a number of subscriber terminal devices in parallel, said method comprising the steps of: establishing a physical connection of said subscriber terminal devices to be connected in parallel; and establishing a logical connection of said subscriber terminal devices to be connected in parallel.

An interface driver for driving the subscriber interfaces that is present in the peripheral control unit of the switching device thereby has a principal subscriber control for controlling a principal subscriber terminal device as well as at least one subsidiary subscriber control for controlling at least one subsidiary subscriber terminal device. A first connection means connects the principal subscriber control to the at least one subsidiary subscriber control, as a result whereof all subscriber terminal devices connected in parallel can be reached under the same telephone number and an incoming call is simultaneously signaled at all subscriber terminal devices. Over and above this, a connection is through-connected to the subscriber terminal device that accepts the incoming call. Further, the subscriber terminal devices connected in parallel always occupy the same line, i.e. the line of the principal subscriber control, as a result whereof the telephone number of the principal subscriber terminal device always appears in the display at the called party, even when the call was actuated from a subsidiary subscriber terminal device.

Further, the interface driver has a second connection means that logically connected the principal subscriber control to the at least one subsidiary subscriber control. In this way, complex telecommunication performance features of the switching device are processed in parallel for both subscriber terminal devices in addition to the connection control. Stated in more precise terms, a modification of a predetermined performance feature at a subscriber

terminal device is simultaneously implemented at all other subscriber devices connected in parallel. The user comfort is thereby extraordinarily improved.

These and other features of the invention are discussed in greater detail below in the following detailed description of the presently preferred embodiments with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic block circuit diagram of a switching device according to the present invention.

Figure 2 is a schematic block circuit diagram of an inventive interface driver upon setup of an internal connection.

Figure 3 is a schematic block circuit diagram of the inventive interface driver in the connection-oriented parallel connection.

Figure is 4 a schematic block circuit diagram of the inventive interface driver in the synchronization of an internal performance feature.

Figure 5 is a schematic block circuit diagram of the inventive interface driver in the synchronization of an external performance feature.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

As a switching device 1, Figure 1 shows a private branch exchange to which a number of subscriber terminal devices are connected. Such subscriber terminal devices are, for example, an analog subscriber terminal device TEA, an ISDN subscriber terminal device TEB, a digital system terminal device TEC as well as a cordless subscriber terminal device TEM. In the case of the analog subscriber terminal device TEA and the ISDN subscriber terminal device TEB, the intelligence or realization of the telecommunications performance features are located mainly in the subscriber terminal devices. Compared thereto, the intelligence in the subscribers terminal devices TEC and TEM is located in the private branch exchange 1, whereby complex telecommunications performance

features are realized in the private branch exchange 1. According to Figure 1, the cordless subscriber telephone device system TEM is composed of two base stations MB and of a cordless telephone or subscriber terminal device MT pertaining thereto.

For connection of the various subscriber terminal devices, the private branch exchange 1 has an insert unit 4 with a number of subscriber interfaces A, B, and M. The subscriber interfaces A, B and M thereby serve for the connection of the illustrated subscriber terminal devices as well as base stations MB for cordless telephones (DECT telephones). Such subscriber interfaces, however, can also serve for the connection of lines to a public exchange and/or for networkings.

A control unit 3 is composed of a central control unit 5 and of a peripheral control unit 6. The central control unit 5 serves, among other things, for the control of switching events, assigning authorizations and the like. Compared thereto, the peripheral control unit 6 is responsible for the linking of the various subscriber interfaces A, B, C and M. Further, the peripheral control unit 6 serves the purpose of realizing terminal device-specific use interfaces and various internal telecommunications performance features such as, for example, team functions, caller lists, etc. According to Figure 1, the peripheral control unit 6 has an interface driver 7 (analog device handler) for driving the analog subscriber interface A or the analog subscriber terminal device TEA. In the same way, an interface driver 8 (ISDN device handler) controls the digital subscriber interface B or the ISDN subscriber terminal device TEB. Further description of these components is foregone below since they are of no significance for the present invention.

By comparison thereto, an interface driver 9 realizes the critical functions for parallel connection of a number of subscriber terminal devices. According to Figure 1, the parallel connection of the digital system subscriber terminal device

TEC with the cordless subscriber terminal device MT via the inventive interface driver 9 is described below.

For controlling and initializing general procedures, the switching device 1 has an operating unit 2 that, as operating technology, coordinates, for example, the allocation of the various subscriber interfaces in the insert unit 4, implements an initialization of the various blocks, serves for input and programming, and also implements a central administration of general data such as, for example, date and time of day.

Figure 2 shows a schematic block circuit diagram of the inventive interface driver 9 upon setup of an internal connection between the cordless subscriber terminal device MT and the wire-bound subscriber terminal device TEC. The reference character C thereby again indicates the subscriber interface or the insert for a digital system subscriber. The reference character M references the subscriber interface or the insert for a mobile subscriber. According to Figure 1, the mobile subscriber is a matter of a base station MB with the pertaining cordless telephone MT. The interface driver 9, in Figure 2, comprises a principal subscriber control (master) and a subsidiary subscriber control (slave) that are allocated to the respective subscriber interfaces C and M. The interface driver 9 according to Figure 2 thus enables the parallel connection of the wire-bound subscriber terminal device TEC with the cordless subscriber terminal device MT. According to Figure 2, the principal subscriber control is composed of a principal line process unit (LTG process) 12C, a principal connection process unit (VEB process) 14C, a principal terminal device process unit (END process) 11C, and a principal key converter process unit (TAK process) 15. In a similar way, the subsidiary subscriber control is composed of a subsidiary line process unit (LTG process) 12M, a subsidiary connection process unit (VEB process) 14M, a subsidiary terminal device process unit (END process) 11M, and a subsidiary key converter process unit (TIC process) 16.

The line process units of the principal and subsidiary subscriber control essentially serve for linking to the central control unit 5 of the switching device 1 as well as for controlling what are referred to as team functions and connections. The connection process units 14C and 14M of the principal and subsidiary subscriber control essentially control the connection setup within the interface driver 9. The terminal device process units 11C and 11M of the principal and subsidiary subscriber control serve for controlling a respective subscriber terminal device and, in particular, for controlling the user interface as well as telecommunications performance features. The terminal equipment process units 11C and 11M thereby generate logical messages for controlling a pertaining subscriber terminal device. Such logical messages can, for example, represent menu structures for the subscriber terminal devices that are deposited in the interface driver 9. The key converter process units 15 and 16 of the principal and subsidiary subscriber control serve for the conversion of the logical messages in the functional messages for direct control of a pertaining subscriber terminal device. Since, according to Figures 1 and 2, the principal subscriber terminal device is composed of the digital system subscriber terminal device TEC and the subsidiary subscriber terminal device is the cordless subscriber terminal device MT, the respective user interfaces of the subscriber terminal devices differ significantly from one another. For example, thus, the cordless subscriber terminal device MT has a completely different keyboard and display than the wire-bound subscriber terminal device TEC.

For this reason, the key converter process unit 15 for the digital, wire-bound subscriber terminal device TEC differs from the key converter process unit 16 for the cordless subscriber terminal device MT. Stated in more exact terms, the key converter process unit 15 administers, among other things, the key data of the wire-bound subscriber terminal device TEC and converts the functional messages of a subscriber terminal device (for example, the third function key was pressed) into logical messages (for example, key having the

function "mailbox" was pressed). In the opposite direction, the key converter process unit 15 assumes the drive of the user interface (for example, LEDs) of the wire-bound subscriber terminal device TEC. For example, the logical message "switch the key having the key function "mailbox" into the flashing status" is converted into the functional message "switch the third function key to flashing".

Since, for example, such a "third function key" is not present at the cordless subscriber terminal device MT, the key converter process unit 16 for the direct control of the cordless subscriber terminal device MT differs fundamentally from the key converter process unit 15 for direct drive of the wire-bound subscriber terminal device TEC. Stated more exactly, the key converter process unit 16 does not serve for the conversion of the logical messages into functional messages but, over and above this, for linking the cordless subscriber terminal device (TIC, key converter & interworking unit & cordless multicell integration). By using such key converter process units 15 and 16, the different functional messages of the various subscriber terminal devices are converted into a uniform format of logical messages. This enables a realization for direct control of the greatest variety of subscriber terminal devices in various terminal device families given minimal outlay.

For physical connection of the principal subscriber control to the subsidiary subscriber control, the inventive interface driver 9 has an internal connection process unit 13 that connects the connection process units 14C and 14M of the principal and subsidiary subscriber control to one another. In a similar way, the interface driver 9 has a message interface 17 - as second connection device - that logically connects the terminal device process units 11C and 11M of the principal and subsidiary subscriber control to one another. Stated more precisely, the logical messages between the principal subscriber control and the subsidiary subscriber control are transmitted via this message

interface 17, as a result whereof a synchronization of telecommunications performance features can be realized.

For controlling the various process units in the inventive interface driver 9, this has an administration process unit (UTI process) 10. This administration process unit 10 administers all subscriber terminal devices centrally and particularly serves for memory administration, the log on and log off of subscriber terminal devices, a system run up, a busy lamp field control, a team functionality, etc.

In view of what is referred to as the "team functionality", the inventive interface driver 9 offers the two different solutions of "classic team" and "top team". In the "classic team" having up to eight team subscribers or subscriber terminal devices, the lines of a team partner can be directly seized, whereas, in what is referred to as the "top team", up to 64 subscribers or subscriber terminal devices can be present in the team. In the present case, the "classic team solution" of the interface driver 9 is utilized for the connection-related or connection-oriented parallel connections of the subscriber terminal devices TEC and MT, whereby the functionality of the "top team" is additionally available.

In the "classic team solution" of the interface driver 9, it is essentially the process units 12C, 14C, 11C, 13, 12M, 14M and 11M that are employed.

Whereas an internal connection in the team can be setup with 18 in this way according to Figure 2, i.e. a connection between the wire-bound subscriber terminal equipment TEC and the cordless subscriber terminal device MT, the basis for the connection-related or connection-oriented parallel connection (physical parallelization) of the subscriber terminal devices TEC and MT is shown in Figure 3.

Figure 3 thereby shows a schematic block circuit diagram of the inventive interface driver 9 in the connection-oriented parallel connection of the principal and subsidiary subscriber control. In Figure 3, identical reference characters

reference the same process units or components as in Figure 2, for which reason a more detailed description is foregone below.

Differing from Figure 2, the process units 13, 14C and 14M are combined in Figure 3 to form the connection process unit 14 that, as a first connection device, physically connects the principal subscriber control to the subsidiary subscriber control. According to Figure 3, the cordless subscriber terminal device (mobile telephone) MT seizes the line of the wire-bound subscriber terminal device TEC, since the principal subscriber control is arranged hierarchically above the subsidiary subscriber control and selects the line of the wire-bound subscriber terminal device TEC with priority. Via a corresponding priority circuit (not shown), however, the hierarchy between the principal subscriber control and the subsidiary subscriber control can be modified, as a result whereof, for example, the line of the cordless subscriber terminal device MT is employed with priority for the connection set up or for signaling the unit's own telephone number.

The logical connection of the principal and subsidiary subscriber control or the parallel connection of the performance features in the private branch exchange 1 ensues, according to Figure 2, via the message interface 17 established as second connection device that is connected between the terminal device process units 11C and 11M and the subscriber terminal devices TEC and MT, connected in parallel, or their pertaining principal and subsidiary subscriber controls. The two subscriber terminal devices TEC and MT synchronize their local data via this message interface 17. Stated more precisely, the corresponding datum at the subscriber terminal device connected in parallel is modified via this message interface 17 insofar as a relevant modification of data derives in a subscriber terminal device. What is thereby particularly viewed as data are telecommunications performance features.

A selection regarding which performance features of the private branch exchange 1 take effect in parallel for both subscriber terminal devices TEC and

MT and which do not take effect can thereby be undertaken via a selection unit (not shown). In this way, the cordless subscriber terminal device MT functions quasi as remote control of the wire-bound subscriber terminal device, whereby, for example, an activation of a call redirection at the cordless subscriber terminal device likewise produces a call redirection at the wire-bound subscriber terminal device and automatically activates a LED corresponding to a pertaining call redirection key thereat and outputs a corresponding text in the display (for example, "to:Koch-29201"). When, on the other hand, a setting of a performance feature is undertaken at the wire-bound subscriber terminal device such as, for example, "station guarding on", then a LED of a corresponding function memory key at the wire-bound subscriber terminal device is, for example, activated and the telecommunication performance feature "station guarding" is activated for the two subscriber terminal devices connected in parallel, i.e. calls are no longer delivered. When, after the performance feature "station guarding" has been activated, a corresponding menu is opened at the cordless subscriber terminal device MT, then it is displayed thereat that the performance feature "station guarding" was activated. In the same way, the deactivation of a telecommunications performance feature can be implemented both from the wire-bound as well as from the cordless subscriber terminal device TEC and MT.

The synchronization of telecommunications performance features given subscriber terminal devices connected in parallel is described in greater detail below.

Figure 4 shows a schematic block circuit diagram of the inventive interface driver 9 given the synchronization of an internal telecommunication performance feature. According to Figure 4, a synchronization of performance features fundamentally ensues via the terminal device process units 11C and 11M of the subscriber terminal devices connected parallel or the principal and subsidiary subscriber control pertaining thereto. The terminal device process

units 11C and 11M are thereby logically connected to one another via the message interface 17. In the initialization phase (run-up) of the subscriber terminal devices connected in parallel, the information is thereby stored in the terminal device process units 11C and 11M such that it is respectively a matter of a principal terminal device process unit and a subsidiary terminal device process unit (TWIN Partners), as a result whereof a hierarchic order is defined. Further, addressing information is deposited during the initialization, this being needed in order to address the respective terminal device process unit of the pertaining subscriber device (connected in parallel).

According to Figure 4, the synchronization of a telecommunications performance feature is shown that is only locally realized, i.e. internally in the interface driver 9, and does not require any communication with other modules or units of the private branch exchange 1.

For example, a performance feature is activated at the cordless subscriber terminal device (mobile telephone) MT via the selection of a specific menu point (for example, call distribution in the top team on). A functional message is routed ① to the key converter process unit (TIC process) from the cordless subscriber terminal device MT via the pertaining base station MB to the corresponding subscriber interface M (mobile subscriber insert). The key converter process unit 16 edits the functional message of the subscriber interface M (for example, "soft key 1 was pressed") and sends a logical message (for example, call distribution on) to its own terminal device process unit 11M②. The performance feature (call distribution in top team on) is now implemented in the terminal device process unit 11M of the subsidiary subscriber control (mobile telephone) and the new status of the subscriber terminal device is stored. It is also found that the cordless subscriber terminal device MT is a matter of a subscriber in a parallel circuitry configuration (TWIN configuration),

and a logical message is sent ③ via the message interface 17 that contains the logical message to activate the call distribution.

The terminal device process unit 11C of the subscriber terminal device TEC connected in parallel (TWIN partner) now likewise processes this logical message and activates the corresponding performance feature. At the same time, the new condition or status is deposited in its local data memory. Further, it is found in the terminal device process unit 11C that a key function is allocated to this performance feature, for which reason a logical message is sent ④ to the key converter process unit 15. According to this logical message, a key having the key function "call distribution" should be sought in the key data of the key converter process unit 15 and the pertaining LED should be turned on. Accordingly, the key converter process unit 15 searches the key data and, when a corresponding key function is found, switches the corresponding LED at the wire-bound subscriber terminal device on ⑤ via a functional message (for example, "switch the seventh LED at the subscriber terminal device").

With the activation of the performance feature at the cordless subscriber terminal device MT, accordingly, the corresponding performance feature is activated at the subscriber device TEC connected parallel (TWIN partner) and is also potentially signaled.

Figure 5 shows a schematic block circuit diagram of the inventive interface driver 9 given the synchronization of an external telecommunication performance feature.

In contrast to Figure 4, the executive sequence for the activation of a performance feature that is not realized within the interface driver 9 is shown in Figure 5; rather this is located in other units of the private branch exchange 1 or in an external server or computer.

This case, accordingly, requires a communication with other units within the private branch exchange 1. For example, a performance feature is selected

at the cordless subscriber terminal device MT (mobile telephone) via the selection of a menu point (for example, station guarding on). In the same way as in the synchronization process according to Figure 4, a functional message is first routed ① to the key converter process unit (TIC process) 16 from the cordless subscriber terminal device MT via the base station MB and the pertaining subscriber interface M. The functional message of the subscriber interface M (for example, soft key 2 was pressed) is again edited in the key converter process unit 16 and is sent ② to the terminal device process unit 11M as logical message (for example, station guarding on).

It is then found in the terminal device process unit 11M that this performance feature is not realized in the interface driver 9. It is also found that the cordless subscriber terminal device MT is a matter of a subscriber terminal device in a parallel circuitry configuration (TWIN configuration). Dependent on its hierarchic order, the terminal device process unit 11M sends a logical message via the message interface 17 to the terminal equipment process unit 11C of the principal subscriber control ③. The terminal device process unit 11C now processes the logical message (for example, station guarding on), whereby it is likewise found that this performance feature is not realized in the interface driver 9. The terminal device process unit 11C therefore sends a corresponding logical message ④ via the line process unit 12C to the central control unit 5 of the private branch exchange 1 or the module of the private branch exchange 1 that controls this performance feature) ⑤. The central control unit 5 acknowledges the activation of the performance feature, whereby the acknowledgment is routed back ⑥ to the terminal device process unit 11C via the line process unit 12C of the principal subscriber control.

The terminal device process unit 11C now receives the logical message of the central control unit 5, in accord wherewith the performance feature "station

guarding" was activated. With reference to the condition or status of the terminal device process unit 11C and the information in its local data, in accord wherewith it is a matter of a principal subscriber connected in parallel, the terminal device process unit 11C recognizes that the performance feature "station guarding" was activated by the pertaining subsidiary subscriber control. The terminal device process unit 11C of the principal subsidiary control now stores the information that the performance feature "station guarding" was activated in its local data memory.

It is also found in the terminal device process unit 11C that a key function is allocated to this performance feature. Accordingly, a logical message is sent ⑦ to the key converter process unit 15. The information is contained in this logical message that a key with the key function "station guarding" should be sought in the key data of the key converter process unit 15 and the pertaining LED should be activated at the wire-bound subscriber terminal device TEC. When the key converter process unit 15 has found a corresponding key function, it sends a functional message to the corresponding LED in the wire-bound subscriber device (for example, functional message "switch the ninth LED at the subscriber terminal device") ⑧.

Since the terminal device process unit 11C is a matter of a process unit connected in parallel having a higher-ranking hierarchy (TWIN master), the logical message for activating the performance feature "station guarding" is subsequently routed ⑨ via the message interface 17 to the terminal device process unit 11M of the subsidiary subscriber control (TWIN slave). The terminal device process unit 11M of the subsidiary subscriber control, on the basis of its internal condition or status, now recognizes that it has activated this performance feature and can output ⑩ + ⑪ a positive acknowledgement for the activation of the station guarding in the display of the cordless subscriber terminal device MT.

The above-described invention thus makes it possible to operate a wire-bound subscriber terminal device and a cordless subscriber terminal device at a private branch exchange such that both subscriber terminal devices TEC and MT can be reached under the same telephone number, i.e. an incoming call is simultaneously signaled at both subscriber terminal devices; the connection is through-connected to the subscriber terminal device that accepts the call; both subscriber terminal devices seize the same line, i.e. the telephone number of the wire-bound subscriber terminal device always appears in the display at the called party even when the call ensues from the cordless subscriber telephone device MT; the connection data acquisition ensues as an aggregate of both subscriber terminal devices; and, in addition to the physical call control, the telecommunications performance features for both subscriber terminal devices are also connected in parallel (for example, call reroutings, call back, caller list, mail functionality, fetch call, query connection costs, station guarding on, etc.).

Performance features of the private branch exchange, whose interconnection is not meaningful such as, for example, a do-not-disturb function can continue to be handled separately for the subscriber terminal devices connected in parallel.

The present invention was described above with reference to a cordless and a wire-bound subscriber terminal device. However, it is not limited thereto and, on the contrary, covers all types of subscriber terminal devices that can be operated at a switching device.

Further, the present invention was described with reference to a private branch exchange; however, it can also be applied to public exchange systems and other telecommunications switching devices.

Although modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

WE CLAIM AS OUR INVENTION:

1. A switching device for parallel connection of a number of subscriber terminal devices, said switching device comprising:

an insert unit for providing a number of subscriber interfaces each to one of said subscriber terminal devices; and

a control unit having:

a central control unit for controlling central switching events in said switching device; and

a peripheral control unit for controlling linking of said number of subscriber interfaces to said subscriber terminal devices, said peripheral control unit having:

an interface driver for controlling at least two of said subscriber interfaces, said interface driver having:

a principal subscriber control for controlling a principal subscriber terminal device;

at least one subsidiary subscriber control for controlling at least one subsidiary subscriber terminal device;

a central driver control for central controlling of administration events in said interface driver;

a first connection device for physically connecting said principal subscriber control and said at least one subsidiary subscriber control; and

a second connection device for logically connecting said principal subscriber control to said at least one subsidiary subscriber control.

2. The switching device according to claim 1,
wherein said principal subscriber control comprises:
a first line process unit for linking to said central control unit;
a first connection process unit for controlling a connection setup
for a pertaining subscriber terminal device;
a first terminal device process unit for generating logical
messages for controlling a pertaining subscriber terminal
device; and
a first key converter process unit for converting said logical
messages into functional messages for direct control of a
pertaining subscriber terminal device; and

wherein said subsidiary subscriber control comprises:
a second line process unit for linking to said central control unit;
a second connection process unit for controlling a connection
setup for a pertaining subscriber terminal device;
a second terminal device process unit for generating logical
messages for controlling a pertaining subscriber terminal
device; and
a second key converter process unit for converting said logical
messages into functional messages for direct control of a
pertaining subscriber terminal device.

3. The switching device according to claim 2, wherein said first
connection device comprises an internal connection process unit for physically
connecting said first connection process unit to said second connection process
unit.

4. The switching device according to claim 2, wherein said second connection device comprises a message interface for logically connecting said first terminal device process unit to said second terminal device process unit.

5. The switching device according to claim 1, wherein said subscriber terminal devices are connected in parallel to said switching device and comprise at least one digital wire-bound subscriber terminal device and a cordless subscriber terminal device; and wherein said switching device represents a private branch exchange.

6. A method for connecting a number of subscriber terminal devices in parallel, said method comprising the steps of:

establishing a physical connection of said subscriber terminal devices to be connected in parallel; and

establishing a logical connection of said subscriber terminal devices to be connected in parallel.

7. The method according to claim 6, wherein said logical connection is established by:

acquiring a complex telecommunication performance feature as a functional message;

converting said acquired, functional message into a logical message;

acquiring a parallel connection configuration; and

transmitting said logical message to a terminal equipment process unit connected in parallel.

8. The method according to claim 7, wherein said logical connection is further realized by:

interpreting said logical message as either a local or an external telecommunications performance feature;

transmitting said logical message to either an internal or an external performance feature implementation unit, dependent on said interpretation of said logical message; and

implementing said telecommunications performance feature dependent on said transmitted logical message.

9. The method according to claim 6, wherein said establishment of said physical connection and said connection of said subscriber terminal devices to be connected in parallel is hierarchically ordered.

ABSTRACT OF THE DISCLOSURE

The present invention is directed to a switching device and to a pertaining method for parallel connection of subscriber terminal devices having complex performance features. Subscriber terminal devices connected in parallel are thereby driven in an interface driver via a principal subscriber control and at least one subsidiary subscriber control. Due to the realization of a logical and physical interface between the principal and subsidiary subscriber control, the subscriber terminal devices are connected to one another both connection-oriented as well as with respect to their performance features.

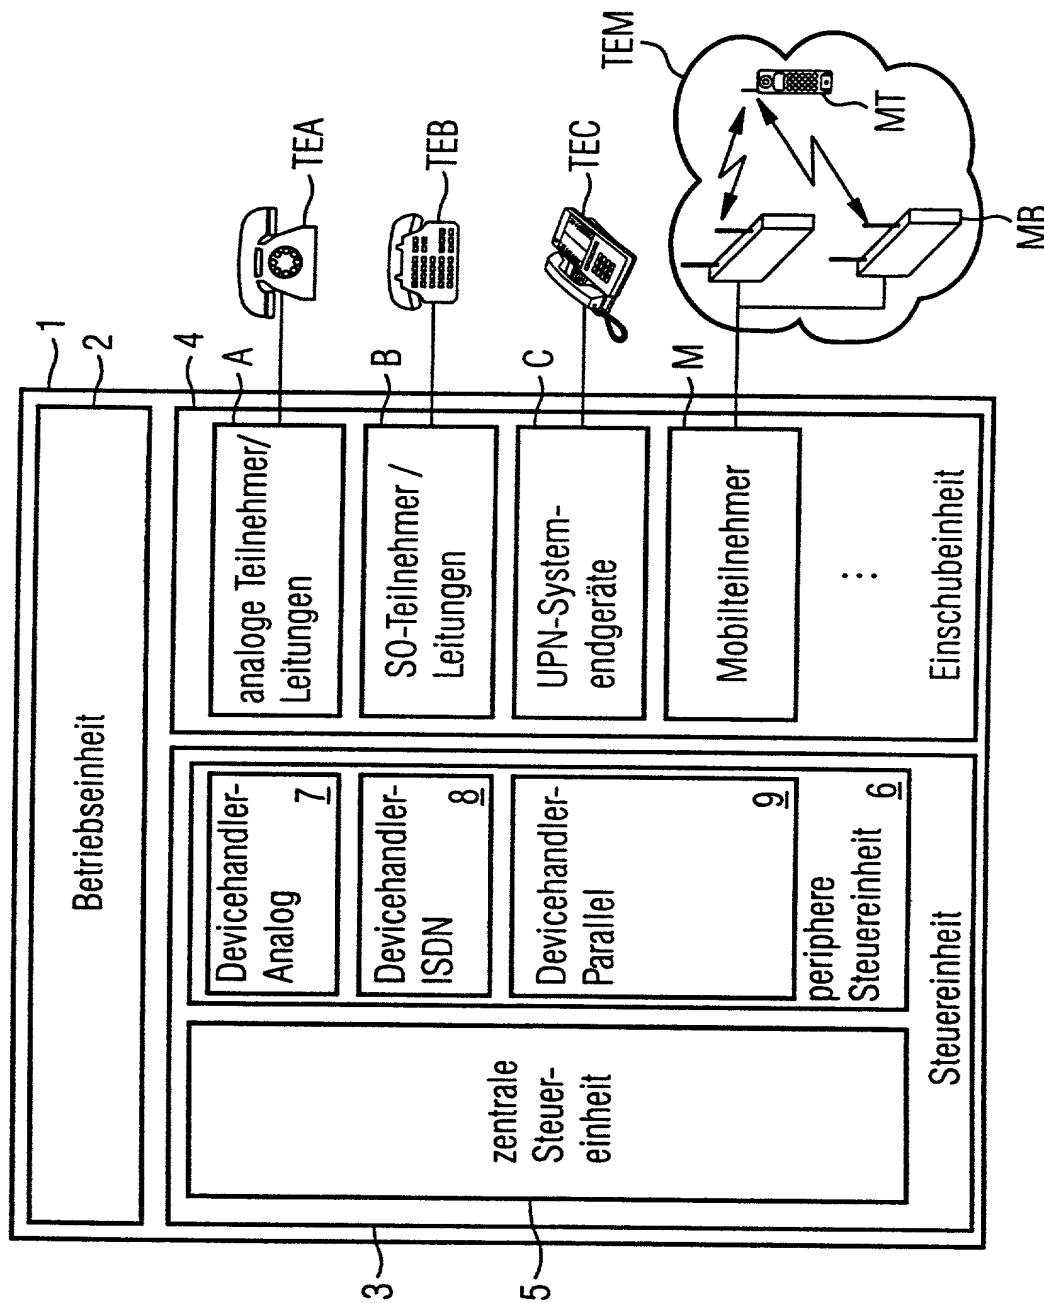
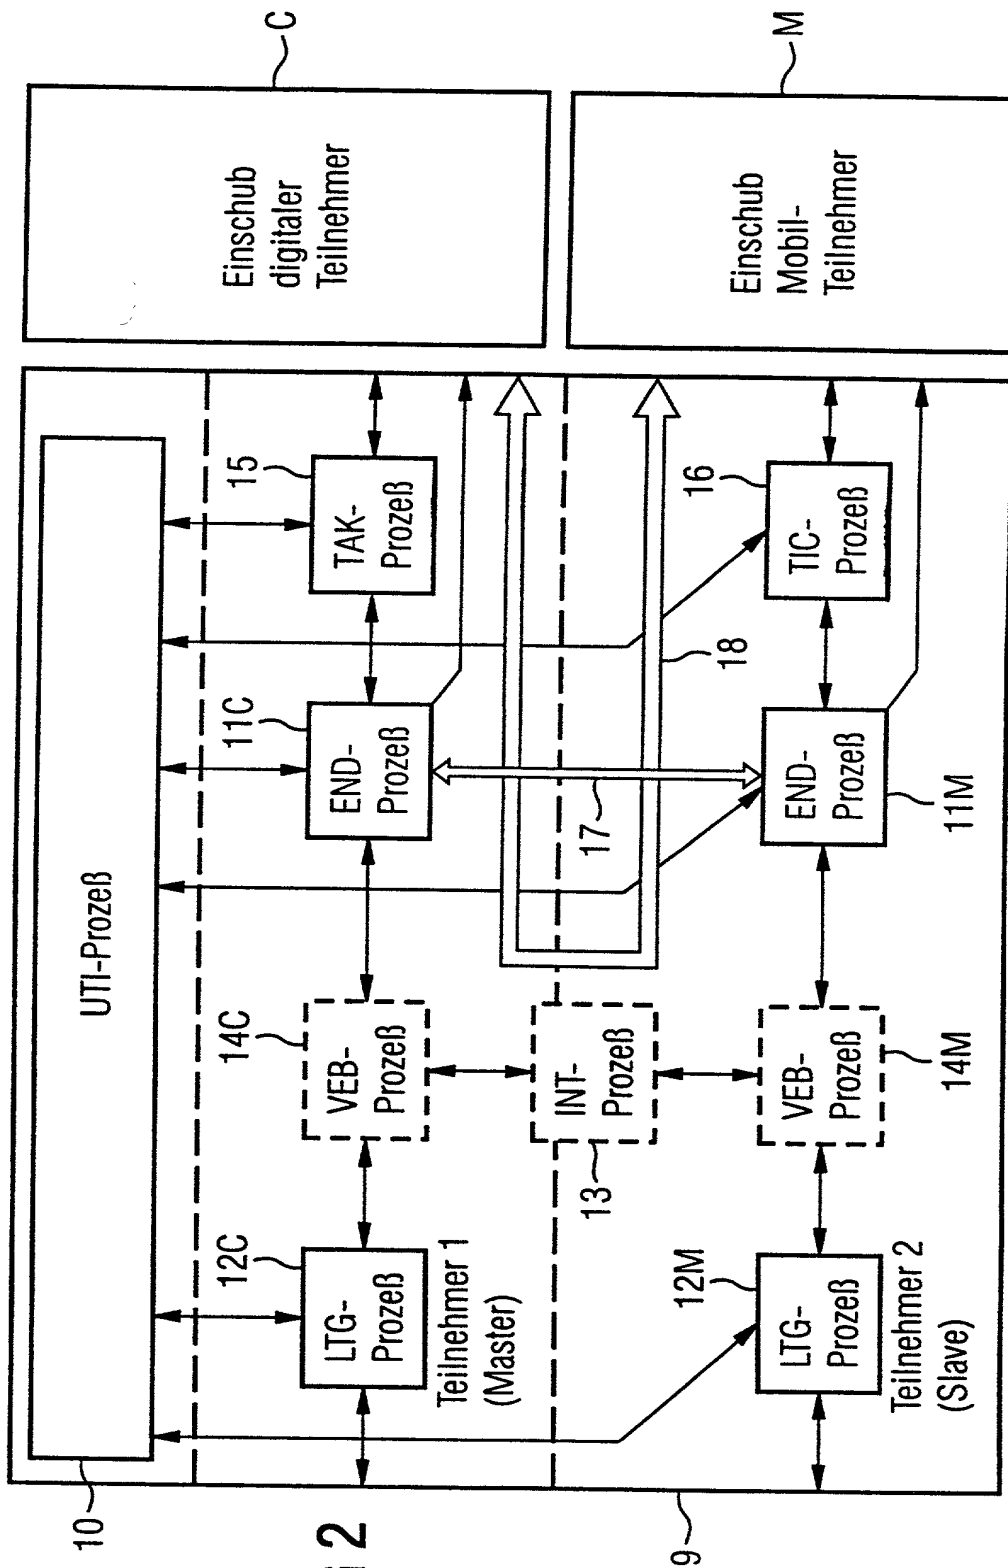


FIG 1



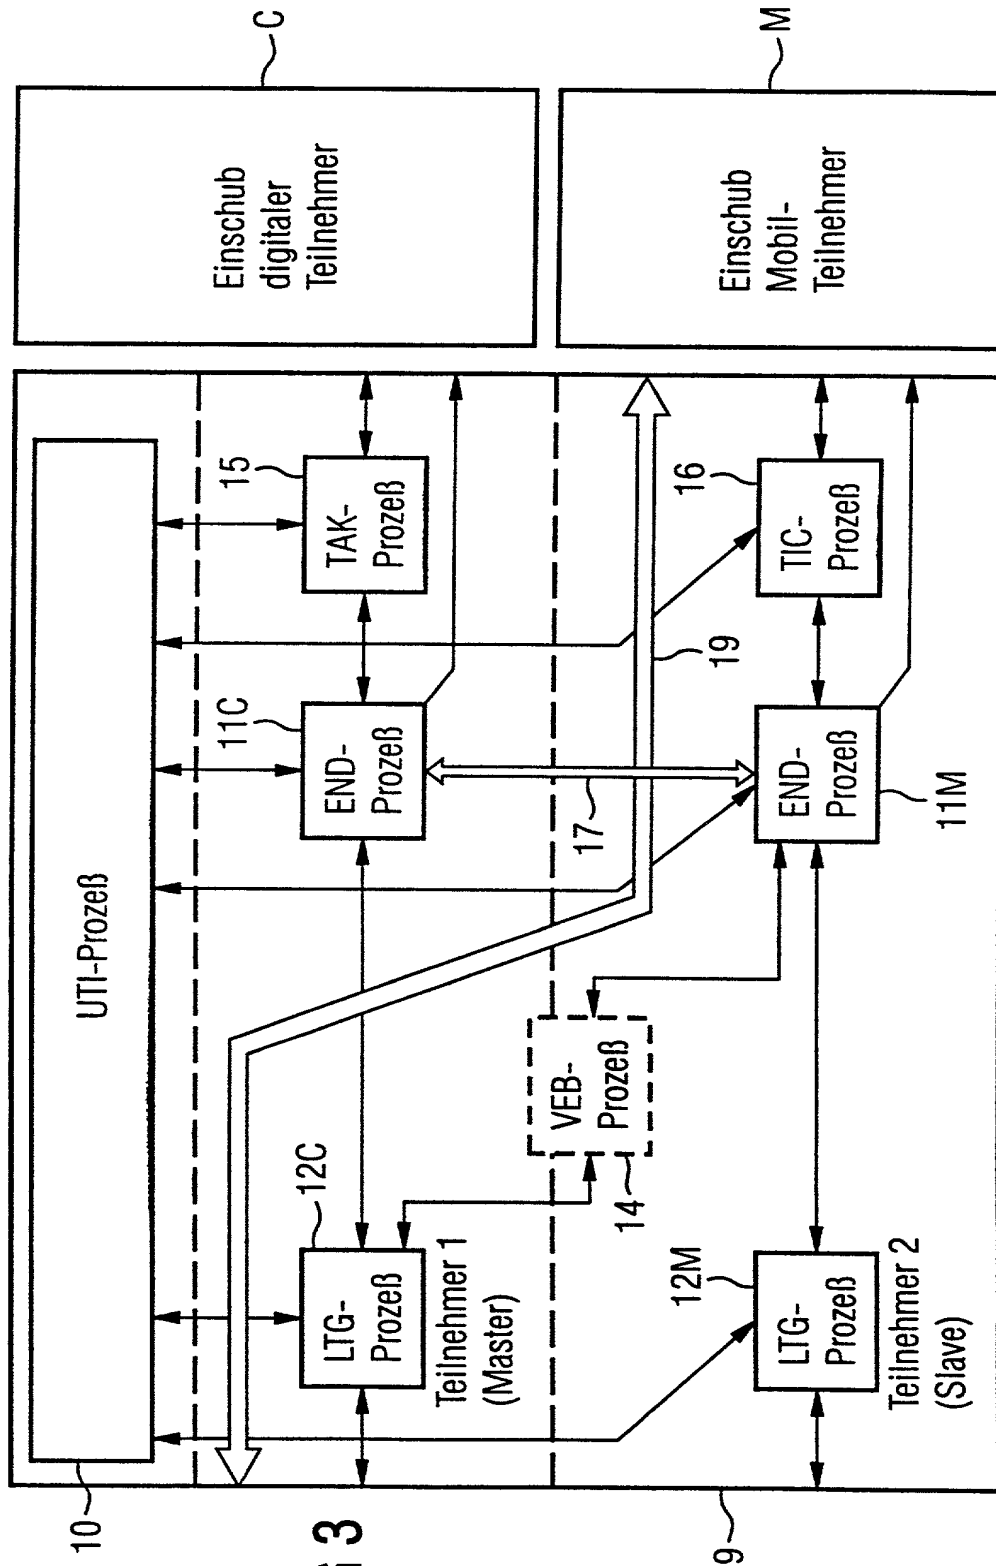
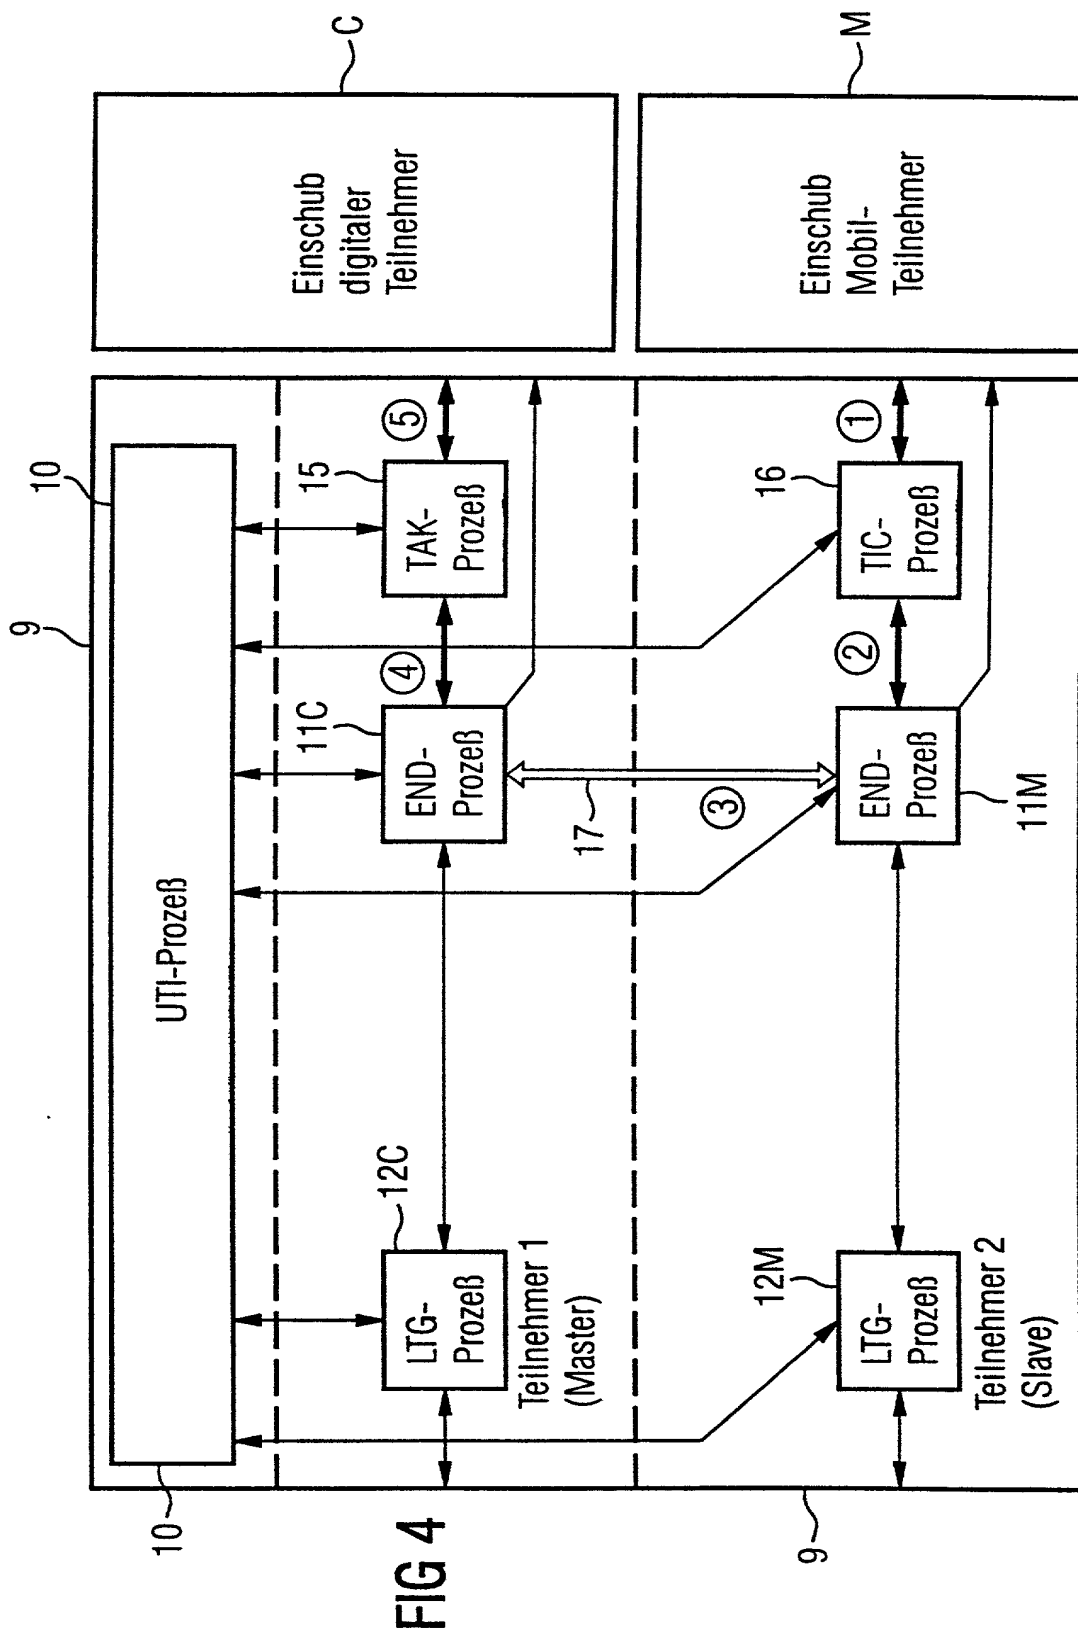


FIG 3



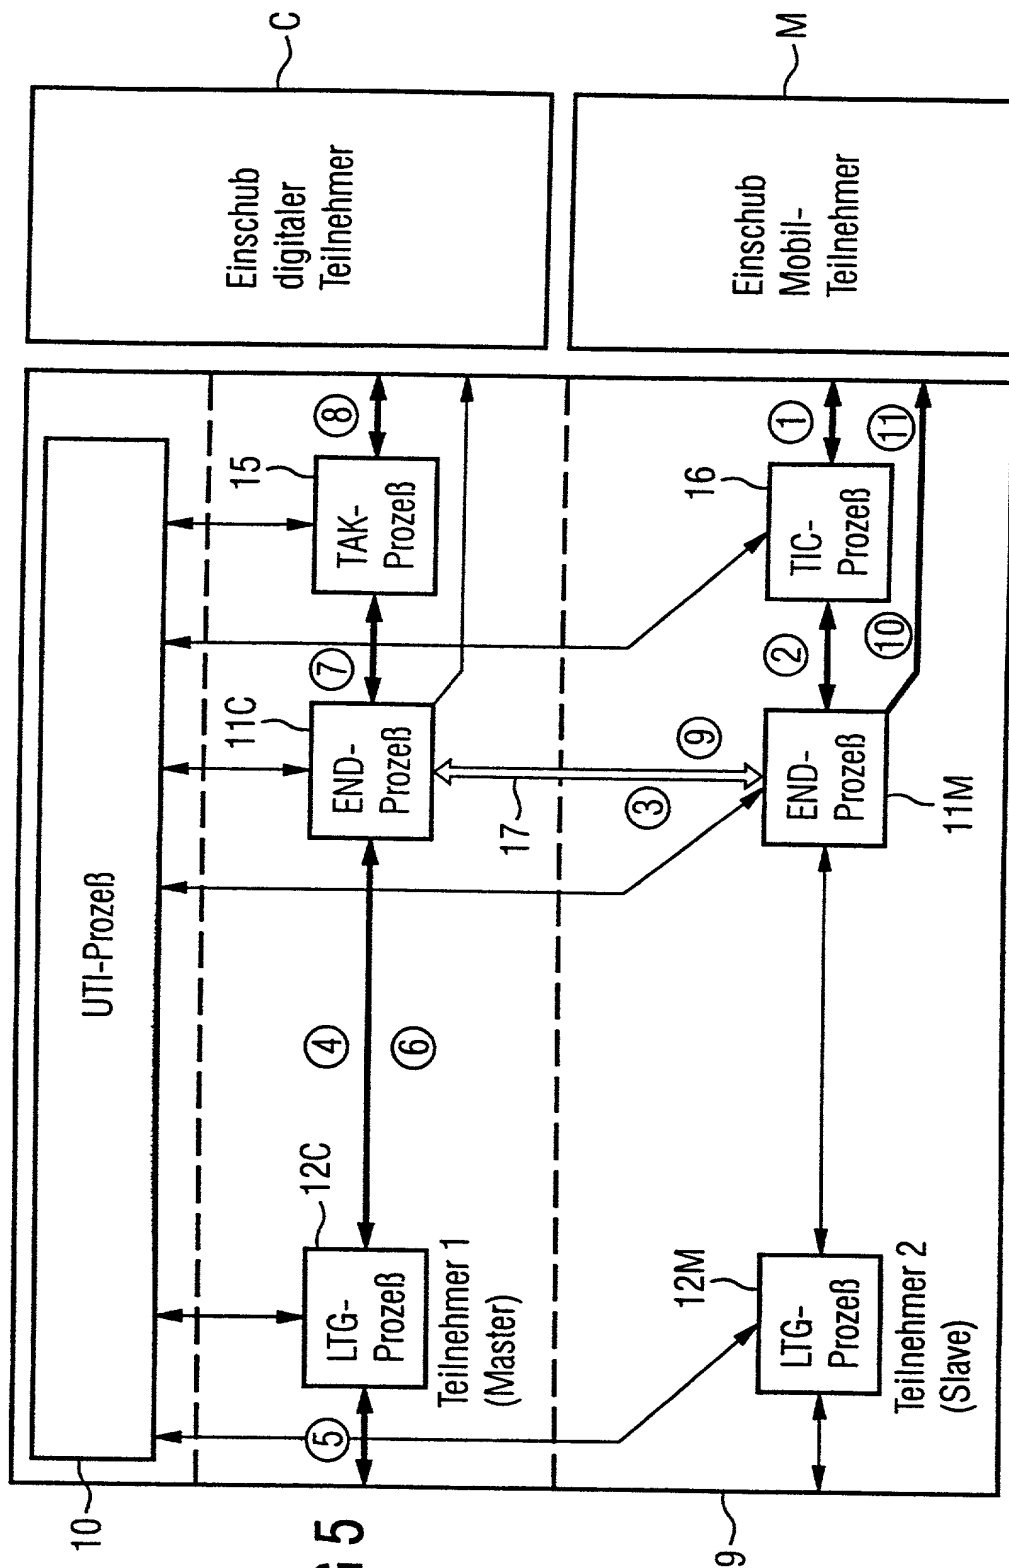


FIG 5

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SWITCHING DEVICE AND METHOD FOR PARALLEL CONNECTION OF SUBSCRIBER TERMINAL DEVICES

Case No. P00,0458, the specification of which

(check
one) ☒ is attached hereto.
☐ was filed on _____, as
Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent Office all information which is known to me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, 1.56.¹

I do not know and do not believe this invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and I believe that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as identified below:

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below

Prior Foreign Application(s)

Number

Country

Date

19911713.6

Germany

March 16, 1999

and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the above listed application on which priority is claimed:

Prior Foreign Application(s)

Number

Country

Date

¹ (b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a *prima facie* case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A *prima facie* case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

If no priority is claimed, I have identified all foreign patent applications filed prior to this application:

Prior Foreign Application(s)

Number

Country

Date

And I hereby appoint Messrs. John D. Simpson (Registration No. 19,842), Dennis A. Gross (24,410), Robert M. Barrett, (30,142), Steven H. Noll (28,982), Kevin W. Guynn (29,927), Robert M. Ward (26,517), Brett A. Valiquet (27,841), Edward A. Lehman (22,312), David R. Metzger (32,919), Todd S. Parkhurst (26,494), James D. Hobart (24,149), Melvin A. Robinson (31,870), Joseph P. Reagan (35,332), Michael R. Hull (35,902), Michael S. Leonard (37,557), William E. Vaughan (39,056) and Lewis T. Steadman (17,074), all members of the firm of Hill & Simpson, A Professional Corporation

Telephone: 312/876-0200 Ext. 3491

my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and direct that all correspondence be forwarded to:

Hill & Simpson
A Professional Corporation
85th Floor Sears Tower, Chicago, Illinois 60606

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor, **HARALD BERGER**

Inventor's signature _____ Date _____
Residence Paderborn, Germany
Citizenship Germany
Post Office Address Helmerner Weg 8
33100 Paderborn, Germany

Full name of second joint inventor **MARKUS JABS**

Inventor's signature _____ Date _____
Residence Lichtenau, Germany
Citizenship Germany
Post Office Address Ermlandstr. 38
33165 Lichtenau, Germany

Full name of third joint inventor,
(if any) **GERHARD SCHARFEN**

Inventor's signature _____ Date _____
Residence Wuennenberg, Germany
Citizenship Germany
Post Office Address Muehlenstr. 1
33181 Wuennenberg, Germany